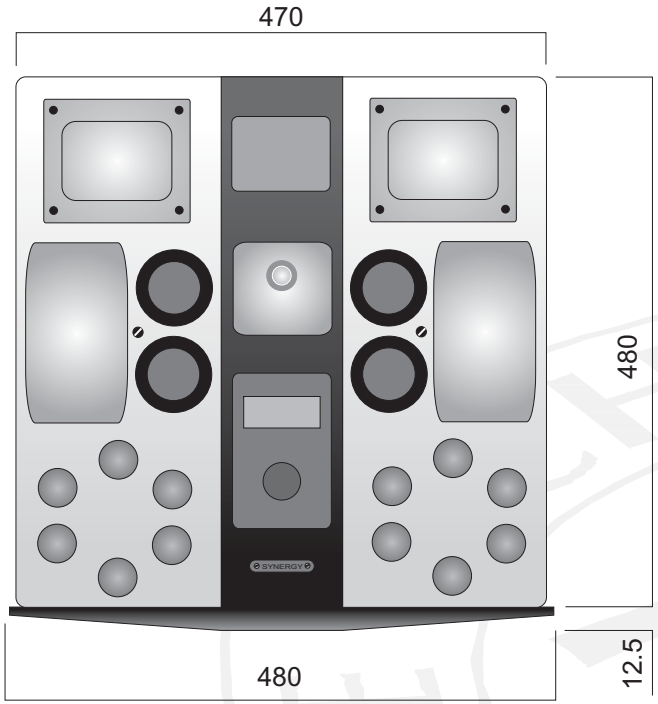

All measurements
in mm

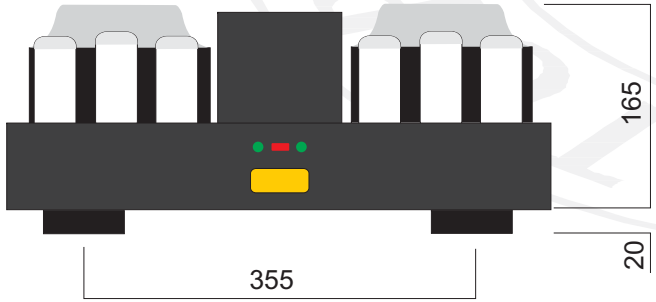

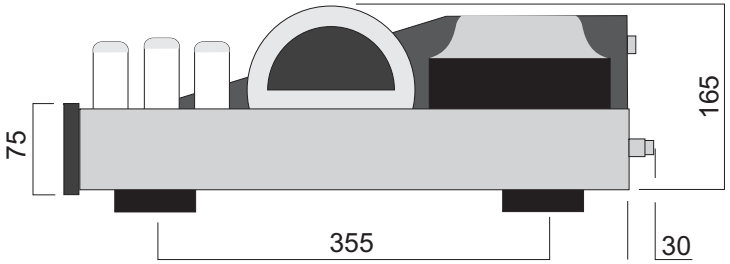

Specifications

No. of Inputs - 1 single ended input per channel
Input Sensitivity = 775mV RMS for max power @ 150W
Input Impedance = 130 kohms
Class of Operation - AB1
Type of Operation - push pull, ultra-linear
Output Power = 150 watts RMS per channel into 8 ohms
Nominal Speaker Load = 8 or 2 ohms
Rated Power Bandwidth = 12Hz - 55kHz @ 150W -1dB
Frequency Response = 4 Hz - 68kHz @ 1 W -1dB
Total Harmonic Distortion = 0.05% @ 1W
0.3% @ Half Power
1.0 % @ Full Power
Signal to Noise Ratio = -85dB unweighted, input shorted
Tube Compliment - 6 x EL34/6CA7 pentode per channel
2 x ECC81/12AT7 twin triode per channel
Power Consumption: 365 W quiescent, 740 W full power @ 240V
Voltage Settings available - 100V, 110V, 120V, 220V, 230V, 240V AC
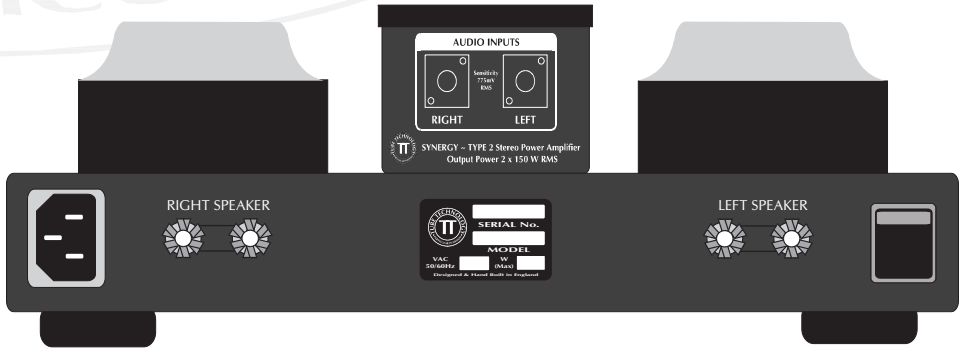
Dimensions - 480 x 483 x 185 mm (W,D,H)
Weight - 40 kg